



PHOTOGRAPHIC EQUIPMENT MANUFACTURER

The company's products cover photography tripod, guide rail, ball head, live broadcast tripod, waterproof fill light, beauty fill light, ring light, lamp holder, etc. We dedicate to the intelligent ecosystem of the photographic equipment industry, creating value for customers and achieving mutual benefit and win-win results.



SHENZHEN BAFANG TECHNOLOGY CO.,LTD.



101-201, Building E1, No.12
Jiaye Road, Hehua Community,
Pinghu Street, Longgang
District, Shenzhen City, China
www.szbfang.cn

BAFANG • LET'S MAKE PHOTOGRAPHY EASY

◆ INNOVATION ◆ HIGH QUALITY ◆ ATTENTIVELY ◆ SERVICE

1 Company profile

01-01

2 Brand Culture

02-02

3 Product overview

03-34

Enterprise introduction

Shenzhen Bafang Technology Co., Ltd., founded in 2022, is a professional photographic equipment company which integrating R&D, design, manufacturing and sales. With "independent research and development, technological innovation" as the business philosophy of the company, adhere to product and technological innovation, strengthen core technological innovation with independent intellectual property rights, constantly enhance the competitiveness of the company, meet the ever-changing technology and service needs of the market, and develop more excellent and reliable professional products for customers. The company has experienced R&D and design personnel, engineering implementation personnel, and high-quality production and management personnel. Through professional technical training assessment, continuous to learning more technological innovation, all staff are committed to creating "world-class reliable" products.

Our products line covered camera tripod, guide rail, rocker arm, mobile phone live broadcast tripod, beauty fill light, ring light, light tripod, background frame, handheld stabilization system and other intelligent photography equipment etc, and the products cover the entire industrial chain. We provide customers with a full set of production and solutions, and have rich experience in cooperation.

The company has professional production equipment, independent CNC precision machining workshop, injection molding workshop, assembly production line and customer service line. We can provide customers with a complete set of processing and production links from source materials to finished products and also professional quality testing equipment.

Bafang is committed to building an ecosystem of image supporting vertical fields. Everything will be possible in the future.

Company Vision: Bafang manufacturing and create the future together
Company Tenet: Dedicated to the intelligent ecosystem of photographic equipment industry
Company Values: Create value for customers and achieve mutual benefit and win-win results
Company Culture: Work happy, struggle happy
Company Spirit: Integrity, responsibility, innovation and focus

Department and equipment display



Machining workshop



CNC machining



Office zone
Engineering Department



Professional Video

FLUID HEADS

Ergonomics, quick setup and smooth operation seamlessly integrated into one product. Ideal for applications such as photography, movies, birdwatching and medium and long telephoto lens shooting.



BFY-03A

Load Capacity: 12 Kg
Rebound force: 2-3Kg
Up and down adjustment: 90° up, 75° down
Horizontal rotation angle: 360°
Bottom thread UNC 3/8"
Base diameter: 70 mm
Product dimensions: W385 x D126 x H140mm



BFY-03B

Load Capacity: 12 Kg
Rebound force: 2-3Kg
Up and down adjustment: 90° up, 75° down
Horizontal rotation angle: 360°
Bottom thread UNC 3/8"
Base diameter: 70 mm
Product dimensions: W385 x D126 x H140mm



Left

Right

Handle

You can install the handle on the left or right side of the pan tilt according to your usage habits



Supports 1/4" and 3/8" screw holes

There are 1/4" and 3/8" mounting screws, which can be selected according to the size of your camera or other device's bottom hole



New Products

FINE ADJUSTMENT GEAR HEAD

The product uses robust aviation aluminum alloy materials and industry-leading innovative design. Through in-depth research and development, Bafang is proud to provide a complete range of digital camera supporting gear PTZ, and the adaptive camera can stably shoot 360° in any environment.

Model	Load Capacity	Left And Right Adjustable Range	Front And Rear Adjustable Range	Rotation Angle Of Clamp Seat	Dimension (mm)	Product Weight (g)
BFC-01A	10Kg	± 40°	30° forward, 90° backward	360°	W119 x D80 x H120	845
BFC-01A+	10Kg	± 40°	30° forward, 90° backward	360°	W119 x D80 x H130	917



BFC-01A



BFC-01A+



BFC-01A is equipped with BFJ-01A panoramic quick release mount, realizing dual panoramic adjustment of the whole head.



BFC-01A+ is equipped with BFJ-03A micro-adjustable panoramic quick release clamp, realizing dual panoramic micro-adjustment for the whole head.

360°
All-round adjustment

10Kg
Load Capacity

0.01mm
High precision fine
adjustment positioning



Model	Load Capacity	Left And Right Adjustable Range	Front And Rear Adjustable Range	Rotation Angle Of Clamp Seat	Dimension (mm)	Product Weight (g)
BFC-02B	5Kg	± 40°	± 90°	360°	W121 x D97 x H145	896
BFC-02B+	5Kg	± 40°	± 90°	360°	W119 x D80 x H155	968



BFC-02B



BFC-02B+



BFJ-01A Panoramic Clamp



BFJ-03A Fine-tuning Panoramic Clamp



Panoramic Clamp Seat Fine Adjustment Knob



Rotate the angle adjustment knob up and down, left and right



Lifttable base

Low Profile And Double Openings For Easy Operation

SPHERICAL HEAD

It's locking structure has been moved to the side of the ball head, the center of gravity has been reduced by 15%, Low gravity center ball head design make it have better stability.



BFQ-55



>>BFJ-50A
Support camera and heavy firing equipment fixed support



>>BFJ-50B
Support camera and heavy firing equipment fixed support



>>BFJ-50C
Support the fixed support of heavy firing equipment

SUPPORT DIY WITH A VARIETY OF CLAMP FREELY

The Camera Head can be used with 99.9% of the clip seats on the market, so you can enjoy more fun by yourself.



BFQ-28A

BFQ-36A

BFQ-40A

BFQ-44A

BFQ-52A

BFQ-55A

Model	Load Capacity	Ball Diameter (mm)	Chassis Diameter (mm)	Bottom Thread	Horizontal Rotation Angle	Dimension (mm)
BFQ-28A	8Kg	28	43	UNC 3/8"	360 °	W103 x D62 x H85
BFQ-36A	10Kg	36	56	UNC 3/8"	360 °	W107 x D70 x H98
BFQ-40A	20Kg	40	53	UNC 3/8"	360 °	W89 x D86 x H88
BFQ-44A	25Kg	44	58	UNC 3/8"	360 °	W90 x D86 x H93
BFQ-52A	30Kg	52	65	UNC 3/8"	360 °	W107 x D95 x H103
BFQ-55A	35Kg	55	72	UNC 3/8"	360 °	W110 x D110 x H97

LOW PROFILE BALL HEAD DESIGN

DIY

Single shot: Pan-tilt can shoot 360 ° panoramic horizontally
Panorama: Panorama shot with the head as a circle

>>BFJ-42 Single view holder



>>BFJ-01A panoramic holder



Color: ● ●



BFJ-01A



BFJ-42



BFJ-50B

DIY BFQ Series Clamp Holders

Hemispherical Adjustment Head LEVELING BASE

Ignore the terrain Easy leveling, 2D heads and cantilever heads are often difficult or even impossible to adjust the level due to special terrain, BFB series leveling heads can be easily adjusted to the horizontal state.



BFB-40A



BFB-40B



Press down on the 3/8" threaded sleeve and the mounting screws become 1/4" in seconds.



Dual-wing locking knobs for easy force and quick release or locking

Model	Load Capacity	Platform Diameter (mm)	Chassis Diameter (mm)	Bottom Thread	Horizontal Shooting Angle	Hemisphere Swing Angle	Dimension (mm)
BFB-40A	10Kg	44	40	UNC1/4" and UNC 3/8"	360 °	±15°	W56 x D44 x H40
BFB-40B	10Kg	40	40	UNC1/4" and UNC 3/8"	360 °	±15°	W61 x D40 x H44
BFB-60A	15Kg	60	50	UNC1/4" and UNC 3/8"	360 °	±15°	W78 x D63 x H45
BFB-68A	20Kg	68	55	UNC1/4" and UNC 3/8"	360 °	±15°	W84 x D71 x H45
BFB-75A	25Kg	75	60	UNC1/4" and UNC 3/8"	360 °	±15°	W93 x D78 x H45



BFB-60A



BFB-68A



BFB-75A




Safe anti-rotation design
The flange is increased to 3 removable screws, which can effectively prevent the base of the head from rotating with the camera by using a hexagonal wrench to move it up.

Unlock New Poses For Taking Pictures Dual Track Overlay

Dual-track superimposition makes it no longer a problem for the camera to move forward, backward, left and right at a fixed shooting angle



BFW-150A

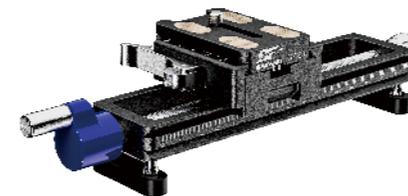

BFW-150B



BFW-180A

Model	Load Capacity	Effective Stroke (mm)	Rail Length (mm)	Guide Rail Stroke per Circle of Knob (mm)	Precision (mm)	Dimension (mm)	Product Weight (g)
BFW-150A	8Kg	110	150	1.25	0.02	W226 x D65 x H59	332
BFW-150B	8Kg	110	150	1.25	0.02	W226 x D65 x H59	352
BFW-180A	8Kg	140	180	1.25	0.02	W256 x D72 x H62	405



Product Material:
Aircraft aluminum alloy, anodic hard oxidation hardening treatment.




Using high-precision screw, the displacement is 1.25mm per revolution, and the adjustment accuracy reaches 0.02mm per grid.



Equipped with quick adjustment handle, according to the actual needs of adjustment, can be fast adjustment, can be slow adjustment can also be fine-tuning.



Matching single view, panoramic quick release clamps.

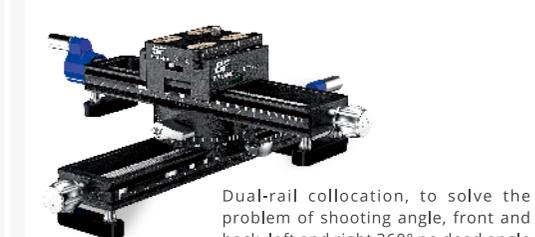

Dual-rail collocation, to solve the problem of shooting angle, front and back, left and right 360° no dead angle fine-tuning

ARCA CLAMP MOUNT

Suit for most camera tripod, monopods, telescopes, ball heads, etc.

Panoramic Clamp



BFJ-01A BFJ-02A BFJ-03A BFJ-04A BFJ-04B

Model	Clamp Rotation Angle	Mounting Screw	Bottom Screw Hole	Dimension(mm)	Product Material	Product Weight (g)
BFJ-01A	360°	M6 x 20mm	UNC 3/8"	W103 x D58 x T30	Aviation aluminum alloy	172
BFJ-02A	360°	M6 x 20mm	UNC 3/8"	W102 x D58 x T30	Aviation aluminum alloy	192
BFJ-03A	360°	M6 x 30mm	UNC 3/8"	W95 x D90 x T38	Aviation aluminum alloy	258
BFJ-04A	360°	M6 x 20mm	UNC 3/8"	W51 x D46 x T28	Aviation aluminum alloy	95
BFJ-04B	360°	M6 x 28mm	UNC 3/8"	W68 x D65 x T37	Aviation aluminum alloy	182

Single View Holder

The Arca dovetail slot supports camera installation with a maximum 42mm dovetail quick release plate. Pica tinny slot supports installation of equipment equipped with Pica tinny rails, such as heavy firing equipment.



BFJ-42 BFJ-50A BFJ-50B BFJ-50C BFJ-58 BFJ-60

Model	Support Card Slot	Mounting Screw	Bottom Screw Hole	Dimension(mm)	Product Material	Product Weight (g)
BFJ-42	Arca Dovetail Slot	M6 x 20mm	3/8" (additional 3/8" to 1/4" screw insert)	W103 x D58 x T30	Aviation aluminum alloy	172
BFJ-50A	Arca dovetail slot and Pica tinny slot	M6 x 20mm	3/8" (additional 3/8" to 1/4" screw insert)	W102 x D58 x T30	Aviation aluminum alloy	192
BFJ-50B	Arca dovetail slot and Pica tinny slot	M6 x 20mm	3/8" (additional 3/8" to 1/4" screw insert)	W95 x D90 x T38	Aviation aluminum alloy	258
BFJ-50C	Picatinnny slot	M6 x 20mm	3/8" (additional 3/8" to 1/4" screw insert)	W51 x D46 x T28	Aviation aluminum alloy	95
BFJ-58	Arca Dovetail Slot	M6 x 20mm	3/8" (additional 3/8" to 1/4" screw insert)	W68 x D65 x T37	Aviation aluminum alloy	182
BFJ-60	Arca dovetail slot and Pica tinny slot	M6 x 20mm	3/8" (additional 3/8" to 1/4" screw insert)	W51 x D46 x T28	Aviation aluminum alloy	95

QUICK RELEASE PLATE



BAFANG quick-release plate adopts the Arca-standard Swiss Mount, universally designed, widely used.

In panoramic photography, the seamless stitching of panoramic photography can be realized by taking the lens axis as the node.

At the same time, it can also be used as a large-scale forward and backward movement adjustment tool for macro photography, reducing the frequency of adjusting the tripod and greatly improving shooting efficiency.



BFK-01A BFK-26A BFK-39A BFK-42A BFK-60A BFK-70A



BFK-120A BFK-150A BFK-240A BFK-300A

Model	Installed Screw	Swiss Mount	Dimension(mm)	Product Material	
BFK-01A	1/4"	Arca-standard	W56 x D39 x T5.5	Aviation aluminum alloy	● There are clear and easy-to-read scales on the left and right sides of the quick release plate, which is convenient for precise adjustment of nodes;
BFK-26A	1/4"	Arca-standard	W39 x D26 x T15	Aviation aluminum alloy	
BFK-39A	1/4"	Arca-standard	W45 x D39 x T17	Aviation aluminum alloy	
BFK-42A	1/4"	Arca-standard	W42 x D39 x T15	Aviation aluminum alloy	
BFK-60A	1/4"	Arca-standard	W60 x D39x T17	Aviation aluminum alloy	
BFK-70A	1/4"	Arca-standard	W70 x D38 x T17	Aviation aluminum alloy	
BFK-120A	1/4"	Arca-standard	W120 x D39 x T17	Aviation aluminum alloy	● BFK-120A and BFK-150A add a 3/8" mounting screw on the basis of the original 1/4" mounting screw to expand the scope of configuration and use;
BFK-150A	1/4"	Arca-standard	W150 x D39 x T17	Aviation aluminum alloy	
BFK-240A	1/4"	Arca-standard	W240 x D39 x T23	Aviation aluminum alloy	● BFK-240A and BFK300A are equipped with two layers of Arca-Swiss and spirit levels, and the upper and lower sides can be installed on the holder.
BFK-300A	1/4"	Arca-standard	W300 x D39 x T23	Aviation aluminum alloy	

Excellent Stability


CARBON FIBER TRIPODS

10 layers of high-quality strong carbon fiber tubes are used as the leg tubes, professional lamination process, The silicone sleeve can fit the metal locking ring firmly for a long time, ensuring high quality, High-strength support makes the tripod lighter and more stable!!

CENTERLESS SERIES



BFST-2841 BFST-2842 BFST-2843 BFST-2844 BFST-2845



10 layers of carbon fiber
4 Sections Leg


Model	Load Capacity	Tube Diameter (mm)	Folded Length (mm)	Deployment Angle	Height Range(mm)
BFST-2841	10Kg	28/25/22/19	540	23°/55°/85°	70-1450
BFST-2842	10Kg	28/25/22/19	480	23°/55°/85°	70-1250
BFST-2843	10Kg	28/25/22/19	540	23°/55°/85°	70-1450
BFST-2844	10Kg	28/25/22/19	540	23°/55°/85°	70-1450
BFST-2845	10Kg	28/25/22/19	540	23°/55°/85°	70-1450

BFST-324 Series

- Max Load Capacity: 15 KG
- Foot Section: 4 sections
- Tube Diameter: 32/28/25/22mm
- Folded Length: 540mm Fold able
- Deployment angle: 23°/55°/85°
- Height Range: 70-1500mm
- Material: 10 layers of carbon fiber



BFST-3241 BFST-3242 BFST-3243 BFST-3244 BFST-3245



Tube Material

The carbon fiber foot tube is made of the latest technology of bulletproof spinning fiber and carbon fiber, which makes the carbon tube lighter in weight, more stable in structure, and stronger than your imagination. The tightness and stability of the foot tube have reached the leading technology in the industry.



Quick Lock Stop System

Leg tube quick lock stop system: Just rotate the foot pad to lock the leg tube easily. The locking system releases and locks more quickly.



Replaceable foot pegs adapt

To sand, wet ground, concrete and any smooth surface.

CENTER SHAFT SERIES

Adopt The Currently Popular Reverse Folding Structure Design

Model	Load Capacity	Foot Section	Tube Diameter (mm)	Folded Length (mm)	Center Column Height (mm)	Deployment Angle	Height Range(mm)	Material
BFST-2541A	8Kg	4 Sections Leg + 1 Section Center Column	25/22/19/16	520	350	23°/55°/85°	350-1650	10 layers of carbon fiber
BFST-2841A	10Kg	4 Sections Leg + 1 Section Center Column	28/25/22/19	600	350	23°/55°/85°	350-1680	10 layers of carbon fiber
BFST-3241A	15Kg	4 Sections Leg + 1 Section Center Column	32/28/25/22	580	350	23°/55°/85°	350-1710	10 layers of carbon fiber



BFST-2541A



BFST-2841A



BFST-3241A



1. The new leg angle locking structure can be quickly and accurately adjusted from gear 1 to 3;
2. Each leg tube has a semi-automatic angle adjustment button, which is more convenient and quick to operate;
3. There are 3 angle adjustment gears, suitable for shooting on uneven terrain;



The hidden hook can hang heavy objects and increase stability.



The metal components of the tripod are all forged from high-quality high-strength aviation aluminum alloy, it has the characteristics of high strength and good stability.

CENTER SHAFT SERIES

Adopt The Currently Popular Reverse Folding Structure Design

Model	Load Capacity	Foot Section	Tube Diameter (mm)	Folded Length (mm)	Center Column Height (mm)	Deployment Angle	Height Range(mm)	Material
BFST-158	10Kg	3 Sections Leg	20/14	680	---	0~23°	630~1500	10 layers of carbon fiber
BFSL-158	10Kg	3 Sections Leg	20/14	680	---	0~23°	630~1500	Aviation aluminum alloy
SS-2041	3Kg	4 Sections Leg + 1 Section Center Column	20/17/14/11	490	350	0~23°	460~1510	Aviation aluminum alloy
SS-2541	3Kg	5 Sections Leg + 1 Section Center Column	23/20/17/14/11	500	350	0~23°	470~1700	Aviation aluminum alloy



BFST-158



BFSL-158



SS-2041



SS-2541



BFSD-01A (Live Broadcast Tripod Stand)

- Max Load Capacity: 5 KG
- Number of leg tube sections: 1 Section + 3 Section Center Column
- Outer diameter of leg tube: 28/25/22/19mm
- Storage height: 480mm Foldable
- Expanded height: 760~2250mm
- Foot tube material: Seamless Steel Tube
- Capacity of Power Bank: 10000mAh
- Output Current: 5V/2.1A, 5V/2.4A, 5V/3A, 9V/1A, 9V/2A, 12V/1.5A

BFSD-01A has 4 mobile phone quick-release clips and 1 microphone holder, which can support 4 devices for online live broadcast at the same time



Three-camera phone mount with ball head, 360° unobstructed shooting



Thickened and thickened legs and enlarged locking knob, easy and fast to adjust the height, easy to lock, more stable

10000 mAh rechargeable battery power, digital power display and seven-color ambient light, for outdoor long-time live broadcasting to provide battery life protection.

CAMERA/PHONE CAGE | Full envelope design Compatible with all possible

COMPREHENSIVE PROTECTION WITHOUT FEAR OF CHALLENGES

Full envelope design, three-dimensional protection, aviation aluminum hardened treatment, strong and durable



MOBILE PHONE CAGE

Compatible with all possible



Bluetooth remote control



Bluetooth Transmitter

BFT-03A

- Dimension: W243 x D28 x H110 mm
- Material: Aviation aluminum alloy
- Weight: 250g
- Expansion Interface: 1/4 screw hole, cold shoe interface
- Compatible Models: Cell phones with a width between 58 ~ 90 mm



Enrich and expand



hard oxidation



Seiko manufacturing



1/4" threaded hole



standard cold shoe



Handle mounted on top



Cold Shoe Interface Expansion Microphone



The handle can rotate 360°

BFT-02B

- Dimension: W248 x D26 x T110 mm
- Product Material: Aviation aluminum alloy
- Product Weight: 313g
- Expansion Interface: 1/4 screw hole, 3/8 screw hole, Arri positioning hole, cold shoe interface
- Compatible Models: Cell phones with a width between 58 ~ 90 mm



Enrich and expand



precise positioning



hard oxidation



Seiko manufacturing



1/4" threaded hole




3/8" threaded hole



Arri positioning hole



standard cold shoe



Handle mounted on top



Handle mounted on the side



Cold Shoe Interface Expansion Microphone

BFT-01A

- Dimension: W380 x D115 x T180 mm
- Product Material: Aviation aluminum alloy
- Product Weight: 613g
- Expansion Interface: 1/4 screw hole, 3/8 screw hole, Arri positioning hole, cold shoe interface
- Compatible Models: Cell phones with a width between 65 ~ 90 mm



Enrich and expand



precise positioning



hard oxidation



Seiko manufacturing



1/4" threaded hole



3/8" threaded hole



Arri positioning hole



standard cold shoe



COLOR



CAMERA CAGE

Compatible with all possible



The Carbon fiber texture brings excellent hand feel not only adds a sleek, modern look to your device but also provides a non-slip grip, ensuring your device stays securely in your hand.



BFT-FX3/FX30

- Dimension (mm): L143 x W65 x H99
- Product Material: Hard anodized aviation aluminum alloy
- Product Weight: 118g
- Expansion Interface: 1/4" screw hole, 3/8" screw hole, cold shoe interface
- Compatible Models: Sony FX3/FX30



BFT-A7CII/A7CR

- Dimension (mm): L138 x W64 x H89
- Product Material: Hard anodized aviation aluminum alloy
- Product Weight: 136g
- Expansion Interface: 1/4" screw hole, 3/8" screw hole, cold shoe interface
- Compatible Models: Sony A7CII/A7CR



BFT-Z8

- Dimension (mm): L180 x W66 x H128
- Product Material: Hard anodized aviation aluminum alloy
- Product Weight: 158g
- Expansion Interface: 1/4" screw hole, 3/8" screw hole, cold shoe interface
- Compatible Models: Nikon Z5/Z6/Z7/Z7II/Z8



BFT-A7M4

- Dimension (mm): L144 x W66 x H106
- Product Material: Hard anodized aviation aluminum alloy
- Product Weight: 205g
- Expansion Interface: 1/4" screw hole, 3/8" screw hole, cold shoe interface
- Compatible Models: Sony A7M4/A7R4/A7R4A/A1/A7SIII/A9II/A7M3/A7III/A7RIII



CAMERA CAGE

Compatible with all possible

Model	Product Weight (g)	Dimension(mm)	Compatible Models
BFT-R5/R6	195	W159 x D65 x H109	Canon EOS R5/R6
BFT-R7	180	W148 x D65 x H108	Canon EOS R7
BFT-EP	161	W149 x D38 x H99	Canon EOS RP
GFX100 II	217	W188 x D78 x H134	Fujifilm GFX100 II
BFT-XT3	201	W146 x D58 x H106	Fujifilm Xt3
BFT-XT4	222	W155 x D58 x H106	Fujifilm Xt4
BFT-XT5	180	W147 x D38 x H106	Fujifilm Xt5
BFT-GH6	190	W157 x D55 x H120	Panasonic Gh6
BFT-Z5	225	W150 x D63 x H110	Nikon Z5/Z6/Z7/Z6II/Z7II
BFT-A7CII/A7CR	136	W138 x D64 x H89	Sony A7CII/A7CR
BFT-A7M3/R3	217	W145 x D65 x H106	Sony A7 III/A7RIII
BFT-A7C	163	W138 x D52 x H96	Sony A7C
BFT-A6000	178	W138 x D49 x H85	Sony A6000/A6300/A6400/A6500
BFT-A6600	170	W139 x D63 x H89	Sony A6600
BFT-A7M4	205	W140 x D62 x H107	Sony A7M4/A7R4/A7R4A/A1/A7S3/A9II/A7M3/A73/A7R3



BFT-XT5



BFT-A7CII/A7CR



BFT-A7M3/R3



BFT-R5/R6

CAMERA L-PLATE

compatible with all possible

Model	Dimension(mm)	Compatible Models
BFL-R5II	W151 x D76 x H92	Canon EOS R5 II
BFL-R6II	W148 x D76 x H92	Canon EOS R6 II
BFL-Z8	W158 x D73 x H88	Nikon Z8



hard oxidation



Seiko manufacturing



standard cold shoe



Cage to the Camera



Cage to the geared head



BFL-Z8



BFL-R5II



BFL-R6II

CAGE EXTENDED ACCESSORIES



BFP-03A

- Product Weight: 160g
- Dimension: W54 x D29 x H96mm
- Product Materials: Aviation aluminum alloy hard oxidation + Rosewood
- Expansion Interface: 1/4 screw hole, 3/8 screw hole, Arri positioning hole, cold shoe interface
- Compatible Models: All cameras, rabbit cages and other devices that support the expansion interface



BFP-04A

- Product Weight: 168g
- Dimension: W152 x D46 x H76mm
- Product Materials: Aviation aluminum alloy hard oxidation
- Expansion Interface: 1/4 screw hole, 3/8 screw hole, 15mm Tube Hole, Arri positioning hole, cold shoe interface
- Compatible Models: All cameras, rabbit cages and other devices that support the expansion interface



BFP-03B


- Product Weight: 199g
- Dimension: W64 x D73 x H109mm
- Product Materials: Aviation aluminum alloy hard oxidation + Rosewood
- Expansion Interface: 1/4 screw hole, 3/8 screw hole, Arri positioning hole, cold shoe interface
- Compatible Models: All cameras, rabbit cages and other devices that support the expansion interface

BFP-04B

- Product Weight: 143g
- Dimension: W118 x D25 x H66mm
- Product Materials: Aviation aluminum alloy hard oxidation
- Expansion Interface: 1/4 screw hole, 3/8 screw hole, 15mm Tube Hole, Arri positioning hole, cold shoe interface
- Compatible Models: All cameras, rabbit cages and other devices that support the expansion interface

PHONE HOLDER

360° panoramic rotation, panoramic live essential

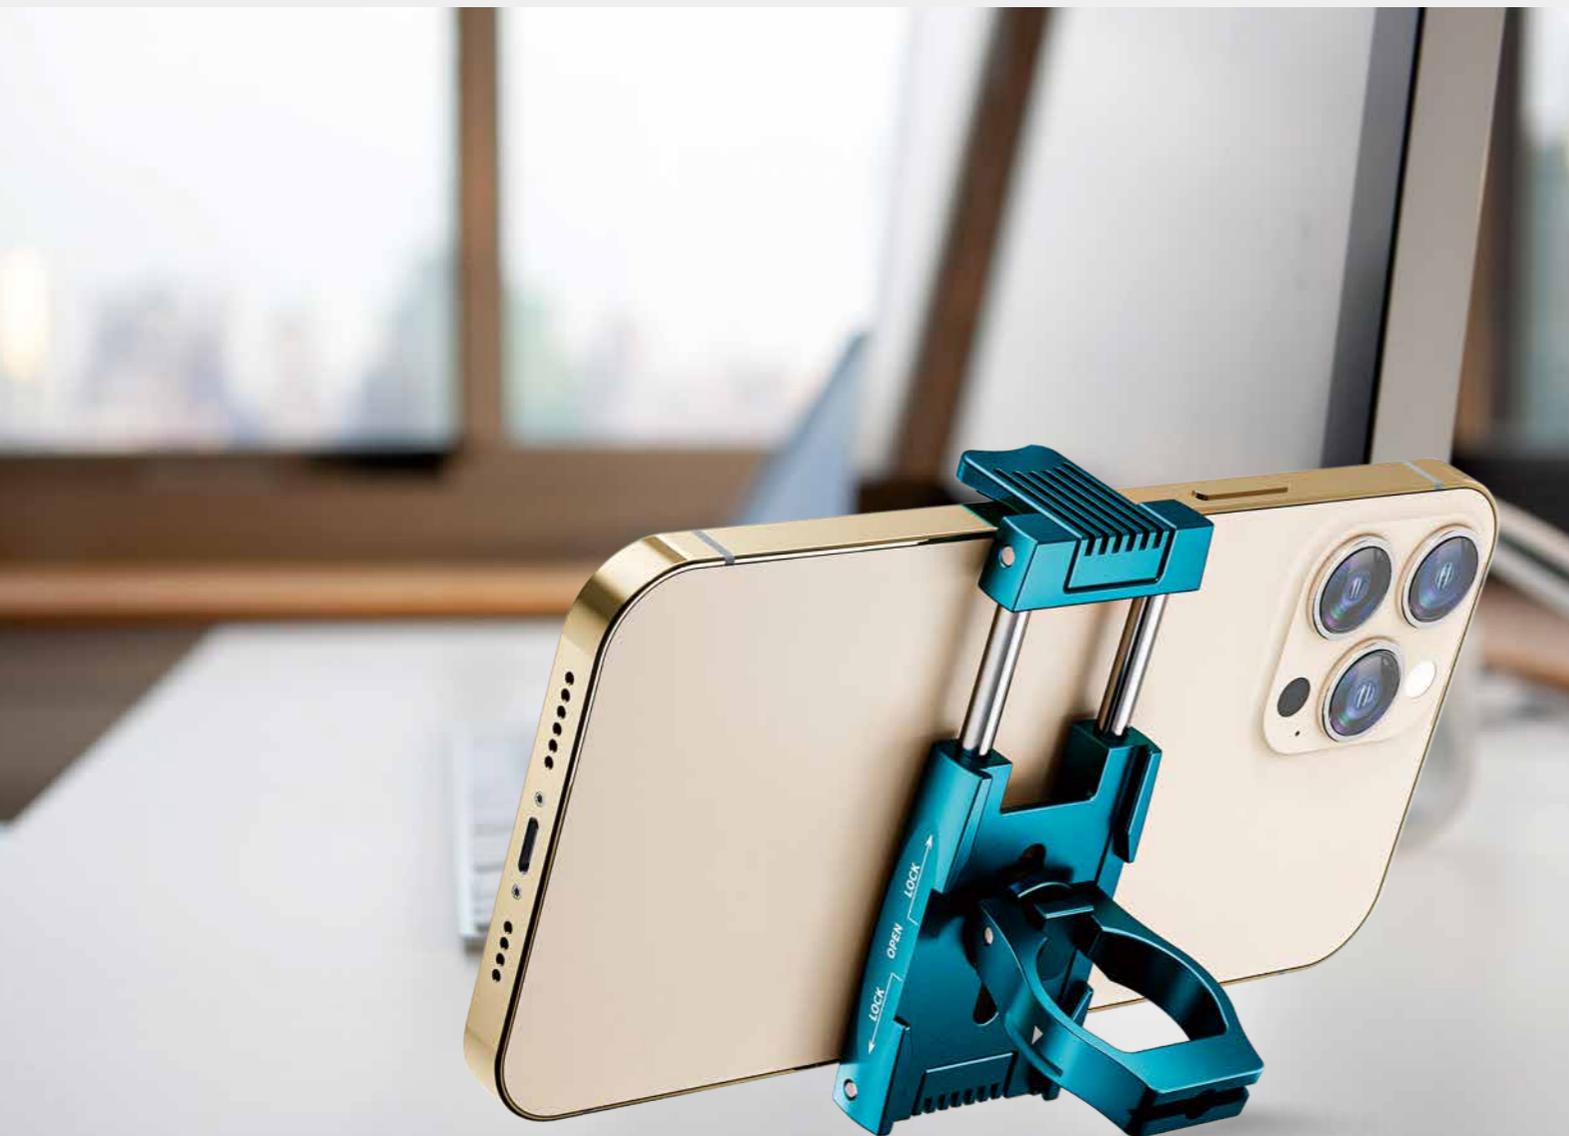

Model	Arm rotation angle	Applicable mobile phone width(mm)	Dimension(mm)	Product material	Product Weight (g)
BFZ-01B	360°	56-92	W63 x D35 x T16	Aviation aluminum alloy	53
BFZ-01C	360°	56-92	W128 x D93 x H102	Aviation aluminum alloy	155



BFZ-01B



BFZ-01C




COLOR



Front 360°, up and down 90° rotation, can be adjusted to any angle of the viewing angle.

1/4" and 3/8" screw holes for perfect adaptation to hand grips, tripods, heads and other equipment.



The angle of the support base can be freely adjusted forward and backward to meet the needs of upward, downward and backward shooting while being stable and firm.

FILL LIGHT

It is perfect light for video conferencing, video shooting, interview, live streaming, YouTube, studio lighting.



ST-49B



ST-68RGB



ST-81B



ST-92RGB

- Compact Body
- Type-c Charging Port
- Brightness Adjustment
- Highlight Leds
- Built-in Lithium Battery
- Color Temperature Adjustment
- Abs Environmental Protection Material
- Indicator Power Display



RGB Fill Light
RGB color gamut: 0-360°
20 Light Modes

Model	Operating Voltage	Power	Cri	Color Temperature	LED Beads Qty	Battery Type	Charging Interface	Beam Angle	Dimension(mm)	Product Weight
ST-120	3.7V	12W	95	2500K-9000K	120PCS	Built-in 3000mAh Li-Battery	Type-C	120°	W106 x D16 x H66	117g
ST-120B	3.7V	12W	95	2500K-9000K	120PCS	Built-in 3000mAh Li-Battery	Type-C	120°	W106 x D40 x H66	152g
ST-120C	3.7V	12W	95	2500K-9000K	120PCS	Built-in 3000mAh Li-Battery	Type-C	120°	W106 x D19 x H66	117g
ST-120RGB	3.7V	12W	95	2500K-9000K	120PCS	Built-in 3000mAh Li-Battery	Type-C	120°	W106 x D16 x H66	117g
ST-156B	3.7V	12W	95	2500K-9000K	156PCS	Built-in 5000mAh Li-Battery	Type-C	120°	W102 x D16 x H77	140g
ST-196	3.7V	12W	95	2500K-9000K	192PCS	Built-in 3000mAh Li-Battery	Type-C	120°	W148 x D16 x H76	158g



ST-120/ST-120RGB



ST-120B



ST-120C



ST-156B

Model	Operating Voltage	Power	Cri	Color Temperature	LED Beads Qty	Battery Type	Charging Interface	Beam Angle	Dimension(mm)	Product Weight
ST-49B	3.7V	4W	95	2500K-9000K	49PCS	Built-in 2000mAh Li-Battery	Type-C	120°	W66 x D16 x H66	72g
ST-68RGB	3.7V	4W	95	2500K-9000K	68PCS	Built-in 2000mAh Li-Battery	Type-C	120°	W66 x D16 x H66	80g
ST-81B	3.7V	6W	95	2500K-9000K	81PCS	Built-in 2500mAh Li-Battery	Type-C	120°	W74 x D16 x H74	92g
ST-92RGB	3.7V	6W	95	2500K-9000K	92PCS	Built-in 2500mAh Li-Battery	Type-C	120°	W74 x D16 x H74	102g



Built-in strong magnet, can be magnetically attracted to the cell phone with iron ring or other items containing iron.



Use with accessories such as carrying clips and cold shoe holders to attach to cell phones, computers, monitors, cameras and other digital devices.



ST-120B with 360° rotating back clip, with the phone perfectly with the fill light, but also can be used as a cell phone desktop stand.

With the portable clip, it is easy to fix it on your cell phone, display and other digital devices.



Standard 1/4" inch screw holes, with a cold shoe mount fixed in the camera for shooting fill light, but also with the hand hanging handle in different environments for fill light

Portable Clamp For Fill Light

Three interface: standard cold shoe Plug head, 1/4" expansion screw, standard cold shoe Male head; Compatible with all fill lights, and can easily clip the fill light on mobile phones, cameras, Laptop.



EXPAND COMPATIBILITY

Multiple cold shoe interfaces are designed to easily realize multi-lamp splicing expansion



ST15RGB

- Product name: Mini camera fill light
- Battery type: Built-in 750mAh lithium battery
- LED Beads Qty: 16pcs
- Charging interface: Type-C
- Beam Angle: 120 °
- Power: 2W
- CRI: > 95
- Dimension: W55 x D30 x H45mm
- Mode: red/orange/yellow/green/cyan blue/blue/purple

- 16 RGB LED Beads
- Type-C charging port
- Digital screen power display
- Standard cold shoe mount
- One-button switching of color lights
- ABS environmental protection material
- Compact body
- RGB color light
- Soft light panel



ST30

- Product name: Mini camera fill light
- Battery type: Built-in 750mAh lithium battery
- Charging Port: Type-C
- Color temperature: 5000K-6000K
- Beam Angle: 120 °
- Power: 2W
- CRI : > 95
- Dimension: W55 x D30 x H45mm

- Digital screen power display
- Standard cold shoe mount
- 750mAh lithium battery
- 31 Highlight LEDs
- ABS environmental protection material
- Silicone diffuser
- Type-C charging port
- One-button switch
- Compact body



ST48N

Soft Light Panel
48 Highlight LEDs
6.5cm Small Square Body
Stepless Knob Adjustment
Standard cold shoe mount
0-100% Brightness Adjustment
AA * 2 (No. 5) Battery Compartment
ABS environmental protection material

ST48B

Strobe Mode
Soft Light Panel
48 Highlight LEDs
Stepless Knob Adjustment
Standard cold shoe mount
5.8cm Square Compact Body
0-100% Brightness Adjustment
Built-in 2000mAh Lithium Battery
ABS environmental protection material

ST60RGB

Strobe Mode
Soft Light Panel
RGB color light
Small Square Body
60 Highlight LEDs
Stepless Knob Adjustment
Standard cold shoe mount
Built-in 2000mAh Lithium Battery
ABS environmental protection material

ST81

Small Square Body
81 Highlight LEDs
Type-C charging port
Multi-Body Combination
Standard cold shoe mount
Digital screen power display
Color Temperature Adjustment
Built-in 3000mAh Lithium Battery
ABS environmental protection material

Product Name	Mini camera fill light			
Model	ST48N	ST48B	ST60RGB	ST81
Working Voltage	3.7V	3.7V	3.7V	3.7V
Power	5.5W	6W	6W	5W
Color Temperature	6000K	5000K-6000K	2500K-9000K	2500K-6000K
Cri	> 95	> 95	> 95	> 95
Beam Angle	120°	120°	120°	120°
Battery	AA (No. 5) battery * 2	2000mAh Lithium Battery	2000mAh Lithium Battery	3000mAh Lithium Battery
Power Display	Without	LED Digital Screen Display	LED Digital Screen Display	LED Digital Screen Display
Switch Mode	Toggle Knob Type	Toggle Knob Type	Toggle Knob Type	Toggle Knob Type
LED Beads Qty	48 Highlight Leds	48 Highlight Leds	60 Highlight Leds	81 Highlight Leds
Dimension	W80 x D25 x H65mm	W75 x D20 x H58mm	W60 x D30 x H75mm	W75 x D30 x H90mm

Light and compact easy to carry

Light as a yarn love to hand, easy to carry
easy to shoot Help run shooting fill light



Restore the true color of objects, and provide high-quality light sources for scenes such as live broadcast room fill light, short video shooting, wedding photography, interview lighting, still life shooting, etc.

STUDIO LIGHT

BF-Y Series photography lights are designed to meet the requirements of digital photography, video photography, video live customized, using high color rendering index LED as light-emitting components, stable light source, color temperature standard, to meet the light and shadow requirements of professional photography and live.





Powerful power



Ultra-high display finger



Precise color temperature



Directional adjustment

Main features

- Standard color temperature, truly restore the color of the object
- Energy saving and green environmental protection, power consumption is reduced by 90%
- Fast response, instant start and restart
- Stepless dimming, 150W~280W bright lamp beads stable light source
- Professional silent fan, meeting the requirements of professional digital photography and video camera
- Suitable for artistic portraiture children's photography, live-action studio, video and micro-film, etc



Model	BF-Y150B	BF-Y220B	BF-Y300B	BF-200S
Color Temperature	2700K-6500K	2700K-6500K	2700K-6500K	2700K-6500K
CRI	≥95	≥95	≥95	≥95
TLCI	≥98	≥98	≥98	≥98
Power	150W	220W	300W	200W
Lamp working voltage	DC48V	DC48V	DC48V	AC100~240V50/60Hz
Adapter working voltage	AC100~240V50/60Hz	AC100~240V50/60Hz	AC100~240V50/60Hz	--
Lighting Network Capability	Yes	Yes	Yes	Yes
Cooling Mode	Auto-Cooling	Auto-Cooling	Auto-Cooling	Auto-Cooling
Dimming	0-100% Stepless dimming	0-100% Stepless dimming	0-100% Stepless dimming	0-100% Stepless dimming
Angle Adjustment	360°	360°	360°	360°
Dimension	W221 x D115 x H170mm			

Main features

- Standard color temperature, truly restore the color of the object
- Energy saving and green environmental protection, power consumption is reduced by 90%
- Fast response, instant start and restart
- Stepless dimming, high bright lamp beads stable light source
- Professional silent fan, meeting the requirements of professional digital photography and video camera
- Suitable for artistic portraiture children's photography, live-action studio, video and micro-film, etc

Model	BF-30W	BF-60W	BF-80W
LED Beads	138PCS LED	COB LED Beads	COB LED Beads
Power	30W	60W	80W
Battery Capacity	3.7V/5400mAh	14.8Wh/3400mAh	—
Color Temperature	2500~9000K	2500~6500K	2500~6500K
CRI	---	≥95	≥95
Beam Angle	120°	120°	120°
Endurance	About2h	About1h	---
Charging Method	Type-C 5V/1A	Type-C PD45W /DC 19V 3.42A 64.98W	DC 19V 3.42A
Output Connector	USB	---	---
External Discharge	5V/1A	---	---
Main Material	PA/PC	ABS/PC	ABS/PC
Dimension	W121 x D34 x H106mm	W102 x D80 x H80mm	W102 x D80 x H80mm

BF-60W/BF-80W



BF-30W



BF-100W/BF-120W



Main features

- Standard color temperature, truly restore the color of the object
- Energy saving and green environmental protection, power consumption is reduced by 90%
- Fast response, instant start and restart
- Stepless dimming, high bright lamp beads stable light source
- Professional silent fan, meeting the requirements of professional digital photography and video camera
- Suitable for artistic portraiture children's photography, live-action studio, video and micro-film, etc

Model	BF-100W	BF-120W
Color Temperature	2700K~6500K	2700K~6500K
CRI	≥95	≥95
TLCI	≥98	≥98
Power	100W	120W
Lamp working voltage	DC19V/5A	DC19V/5A
Adapter working voltage	AC100~240V50/60Hz	AC100~240V50/60Hz
Group	Have	Have
Cooling Mode	Auto-Cooling	Auto-Cooling
Dimming	0-100% Stepless dimming	0-100% Stepless dimming
Dimension	W115 x D117 x H116mm	W115 x D117 x H116mm



Magnetic Super Clamp Suit

BFP-90(Magnetic Super Clamp)

- Installation Screw Holes: 1/4" and 3/8"
- Maximum Clamping Distance: 110mm
- Load Capacity: 3Kg
- Dimension: W160 x D35 x H85 mm
- Product Material: Aviation Aluminum Alloy



BFP-90

BFQ-01A (Inverted Ball head)

- Ball Diameter : 16mm
- Load Capacity: 5KG
- Dimension: W76 x D58 x H47 mm
- Product Material: Aviation Aluminum Alloy



BFQ-01A

BFP-09A (Magic Arm)

- Load Capacity: 3KG
- Dimension: W110 x D35 x H28 mm
- Product Material: Aviation Aluminum Alloy



BFP-09A



BFP-11A

- Support Card Slot : Arca Dovetail Slot
- Dimension: W310 x D125 x T40mm
- Product material: Aviation aluminum alloy
- Product weight: 245g



BFP-90



BFP-10A



BFP-10B



BFP-10C



BFV-01 (V-Shaped bracket)



BFP-01 (Swivel Base)



V-shaped bracket set
Mounting Thread:
1/4" and 3/8"

ACCESSORIES

PHOTOGRAPHY
ACCESSORIES
Compatible with all possible

Tripod FOOTWEAR

- Mounting Thread: 3/8"
- Product Material: Stainless Steel



BFP-05A (Hook)



BFP-07A (Tripod Handle)

Tripod Extended Center Column Power Bank

BFP-08A/BFP-08B

- Mounting screw holes: 1/4" and 3/8"
- Maximum load: 10Kg
- Input current: adaptive current, maximum 5.0A
- Output current: 5V/3A, 9V/2.0A, 12V/1.5A
- Battery capacity: 10000mAh
- Dimension: Ø32 x H215 mm
- Product material: BFP-08A is aviation aluminum alloy
BFP-08B is 10 layers of carbon fiber



▲ 635 *120*120 mm Carrying Bag



▲ 750 *120*120 mm Carrying Bag